


Mircom's MS-700AD(U) Series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets and a permanently attached addressable module. The addressable manual station has a pair of rotary decimal switches which allows for two digit address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

**MS-701AD(U), MS-710AD(U), MS-701ADNY & MS-710ADNY Wiring**

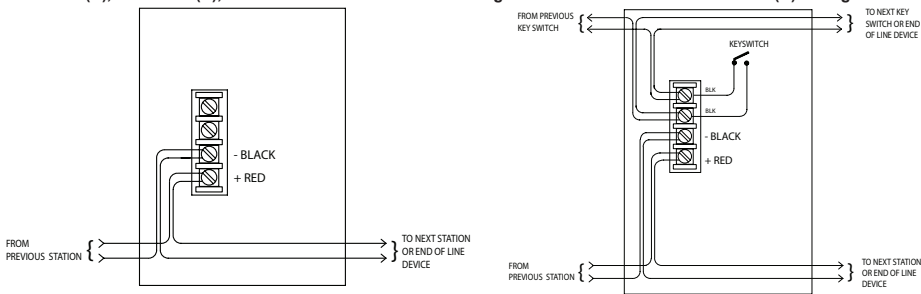

## Specifications

**Switch Rating:** 1 Amp @ 30 VDC  
0.1 Amp @ 120VAC

**Surface-Mount Backbox:** 5.0" H x 3.6" W x 2.0" D

**Current Consumption:** Standby: 400 uA  
Alarm: 5.5 mA

### Notes:

1. Wire as shown so that supervision of connections is maintained.
2. Mount Station To 4" Square X 1 1/2" Deep Outlet Box with plaster ring raised 1/2".
3. Maximum size: No. 12 AWG.
4. Refer To Fire Alarm Control Panel Manual For Addressable Module Setting.
5. Switches shown in the Station Closed position.
6. ADA compliant. To be installed per ADA 4.27.1 to 4.27.4 inclusive.
7. The suffix "U" denotes USA version.

## Models


- MS-701AD(U):** Intelligent Addressable Key Resettable Single-Action Manual Station
- MS-702AD(U):** Intelligent Addressable Key Resettable Dual Stage Single-Action Manual Station
- MS-710AD(U):** Intelligent Addressable Key Resettable Dual-Action Manual Station
- MS-701ADNY:** Intelligent Addressable Key Resettable Single-Action Manual Station New York Version
- MS-710ADNY:** Intelligent Addressable Key Resettable Dual-Action Manual Station New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-937 Rev.5

Mircom's MS-700AD(U) Series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets and a permanently attached addressable module. The addressable manual station has a pair of rotary decimal switches which allows for two digit address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

**MS-701AD(U), MS-710AD(U), MS-701ADNY & MS-710ADNY Wiring**

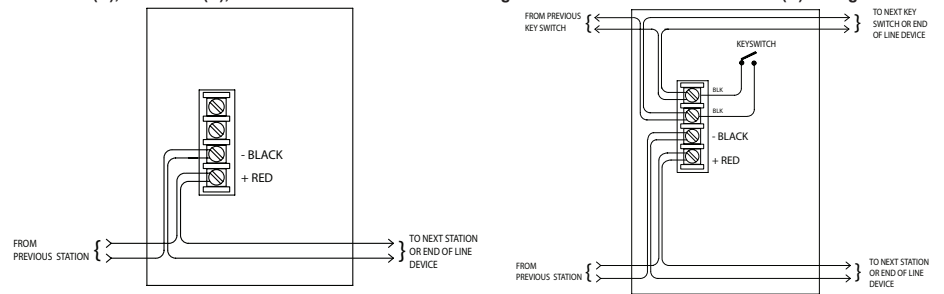

## Specifications

**Switch Rating:** 1 Amp @ 30 VDC  
0.1 Amp @ 120VAC

**Surface-Mount Backbox:** 5.0" H x 3.6" W x 2.0" D

**Current Consumption:** Standby: 400 uA  
Alarm: 5.5 mA

### Notes:

1. Wire as shown so that supervision of connections is maintained.
2. Mount Station To 4" Square X 1 1/2" Deep Outlet Box with plaster ring raised 1/2".
3. Maximum size: No. 12 AWG.
4. Refer To Fire Alarm Control Panel Manual For Addressable Module Setting.
5. Switches shown in the Station Closed position.
6. ADA compliant. To be installed per ADA 4.27.1 to 4.27.4 inclusive.
7. The suffix "U" denotes USA version.

## Models


- MS-701AD(U):** Intelligent Addressable Key Resettable Single-Action Manual Station
- MS-702AD(U):** Intelligent Addressable Key Resettable Dual Stage Single-Action Manual Station
- MS-710AD(U):** Intelligent Addressable Key Resettable Dual-Action Manual Station
- MS-701ADNY:** Intelligent Addressable Key Resettable Single-Action Manual Station New York Version
- MS-710ADNY:** Intelligent Addressable Key Resettable Dual-Action Manual Station New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-937 Rev.5

Mircom's MS-700AD(U) Series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets and a permanently attached addressable module. The addressable manual station has a pair of rotary decimal switches which allows for two digit address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

**MS-701AD(U), MS-710AD(U), MS-701ADNY & MS-710ADNY Wiring**

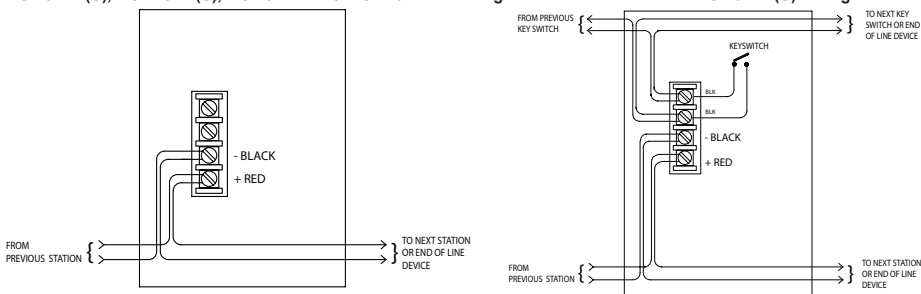

## Specifications

**Switch Rating:** 1 Amp @ 30 VDC  
0.1 Amp @ 120VAC

**Surface-Mount Backbox:** 5.0" H x 3.6" W x 2.0" D

**Current Consumption:** Standby: 400 uA  
Alarm: 5.5 mA

### Notes:

1. Wire as shown so that supervision of connections is maintained.
2. Mount Station To 4" Square X 1 1/2" Deep Outlet Box with plaster ring raised 1/2".
3. Maximum size: No. 12 AWG.
4. Refer To Fire Alarm Control Panel Manual For Addressable Module Setting.
5. Switches shown in the Station Closed position.
6. ADA compliant. To be installed per ADA 4.27.1 to 4.27.4 inclusive.
7. The suffix "U" denotes USA version.

## Models


- MS-701AD(U):** Intelligent Addressable Key Resettable Single-Action Manual Station
- MS-702AD(U):** Intelligent Addressable Key Resettable Dual Stage Single-Action Manual Station
- MS-710AD(U):** Intelligent Addressable Key Resettable Dual-Action Manual Station
- MS-701ADNY:** Intelligent Addressable Key Resettable Single-Action Manual Station New York Version
- MS-710ADNY:** Intelligent Addressable Key Resettable Dual-Action Manual Station New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-937 Rev.5

Mircom's MS-700AD(U) Series provide manual fire reporting. These high quality, die-cast metal Intelligent Fire Alarm Manual Stations are available as single or dual-action devices with key resets and a permanently attached addressable module. The addressable manual station has a pair of rotary decimal switches which allows for two digit address setting. Pulling the handle initiates the operation of the addressable module. New York versions are equipped with a front guard plate.

**MS-701AD(U), MS-710AD(U), MS-701ADNY & MS-710ADNY Wiring**

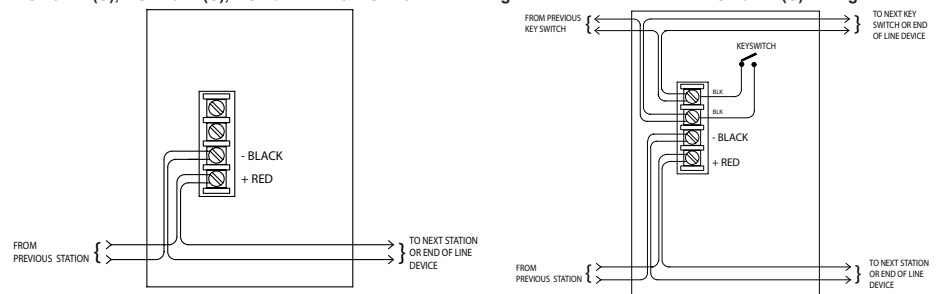

## Specifications

**Switch Rating:** 1 Amp @ 30 VDC  
0.1 Amp @ 120VAC

**Surface-Mount Backbox:** 5.0" H x 3.6" W x 2.0" D

**Current Consumption:** Standby: 400 uA  
Alarm: 5.5 mA

### Notes:

1. Wire as shown so that supervision of connections is maintained.
2. Mount Station To 4" Square X 1 1/2" Deep Outlet Box with plaster ring raised 1/2".
3. Maximum size: No. 12 AWG.
4. Refer To Fire Alarm Control Panel Manual For Addressable Module Setting.
5. Switches shown in the Station Closed position.
6. ADA compliant. To be installed per ADA 4.27.1 to 4.27.4 inclusive.
7. The suffix "U" denotes USA version.

## Models

- MS-701AD(U):** Intelligent Addressable Key Resettable Single-Action Manual Station
- MS-702AD(U):** Intelligent Addressable Key Resettable Dual Stage Single-Action Manual Station
- MS-710AD(U):** Intelligent Addressable Key Resettable Dual-Action Manual Station
- MS-701ADNY:** Intelligent Addressable Key Resettable Single-Action Manual Station New York Version
- MS-710ADNY:** Intelligent Addressable Key Resettable Dual-Action Manual Station New York Version

All manual fire alarm stations shall be installed as per the specific requirements outlined in the UL codes, as well as all other applicable national or local codes. Final acceptance is subject to the local authority having jurisdiction.

LT-937 Rev.5